

DRIVEWAY PERMIT

Application for Construction, Reconstruction, Alteration or Enlargement of access to public Right of Way

The undersigned applicant represents that this application is for the bona fide purpose of securing access to the above described property. It is not to be used for the purpose of parking or servicing vehicles, the advertising, storage or merchandising of goods, or for any other purpose, within the dedicated portion of a City Street.

The undersigned applicant acknowledges that the City of Beloit, notwithstanding the construction of this driveway, reserves the right to make any changes, additions, repairs, or relocations within the dedicated portion of the City street at any time. This shall include the relocation, reconstruction, widening, and maintaining of said street without compensating the owner of such private driveway for the damage or destruction of such private driveway.

The undersigned applicant, his successors or assigns, agrees to indemnify and hold harmless the City of Beloit, its officials, officers, agents and employees, against any claim or any cause of action for personal injury or property damage sustained by reason of the exercise of this permit.

The undersigned applicant acknowledges that the City of Beloit does not assume any responsibility for the removal or clearance of snow, ice, or sleet, or the opening of any windrows of such material upon such portion of such driveway within the dedicated portion of the City street.

The undersigned applicant acknowledges that the City reserves the right to control or restrict the flow of traffic into and out of said driveway, including the construction of physical barriers within the traveled portion of the street to implement such controls.

The undersigned applicant certifies that he represents all parties in interest for the property involved and has read all of the above and agrees to be bound by the terms stated.

Print Name	Signature	Date
	awing accurately depicting the proposed private driveway, the of the materials to be used.	ne dimensions thereof, and a
Phone number at w	which the applicant can be reached for questions:	
	the completed Permit should be mailed:	
City Engineer: Subject to conditio	Approved Denied By:	Date



DRIVEWAY SPECIFICATIONS

For Construction, Reconstruction, Alteration or Enlargement of access to public Right of Way

Material:

The City Engineer approves driveway approaches as follows:

On streets with existing curb and gutter: 6 inch thick WDOT Grade A concrete

Concrete driveways must be isolated from the sidewalk and from the curb with ½" thick bituminous felt expansion joint material.

On streets without curb: 2 inch thick bituminous asphalt over 6 inches of gravel.

The City Engineer reserves discretionary approval upon request for brick or other materials for historical, architectural, or aesthetic value. *Ref. 7.23(8)(a) & 12.09(4)n

Width:

The maximum width of a residential driveway is 20 feet measured at the sidewalk or the right of way line. The minimum is 10 feet wide. The maximum width of a commercial driveway is 30 feet measured at the sidewalk or the right of way line. The City Engineer reserves discretionary approval of a wider commercial driveway if necessary. *Ref. 11.23 & 19.VII-113.c.2

Length:

The driveway approach is that portion of the driveway located in the public right of way. For the purpose of code compliance a property owner may hire a professional land surveyor to accurately determine the right of way line. Alternatively one may estimate the right of way limits based upon: found iron pins; 18 inches toward the house from the existing sidewalk; or from a table of right of way widths, surface widths, and terrace widths of the subject street. When no sidewalk exists, the applicant should request line and grade stakes to be set by the City Engineering Division.

Flare:


A driveway flare is that part of the approach that widens near the street in order to ease the turning movement of cars into the driveway. The flare should be triangular and proportional to the terrace width. An existing curb opening may be enlarged or rebuilt to accommodate the requested improvement. Suggested flare widths are as follows:

Terrace width	Flare width
3 feet or less	1 foot each side
3 to 6 feet	2 feet each side
6 to 9 feet	3 feet each side

In no case may the flare width exceed 4 feet for a residential drive or 5 feet for a commercial drive.

Other considerations:

All work on driveway approaches requires a permit. Additional conditions may be imposed by the engineer upon review of the application and the site including, but not limited to: separation from other driveways and intersections; alignment and grade of driveway with respect to roadway and site improvements; conflicting utilities; and culvert pipes. Generally only one driveway is permitted for each residential lot, but a corner lot or an extra wide lot may apply for two driveways. Driveway approaches must lead to legal parking spaces. *Ref. 19.VII-107.c & 19.XI.3.57

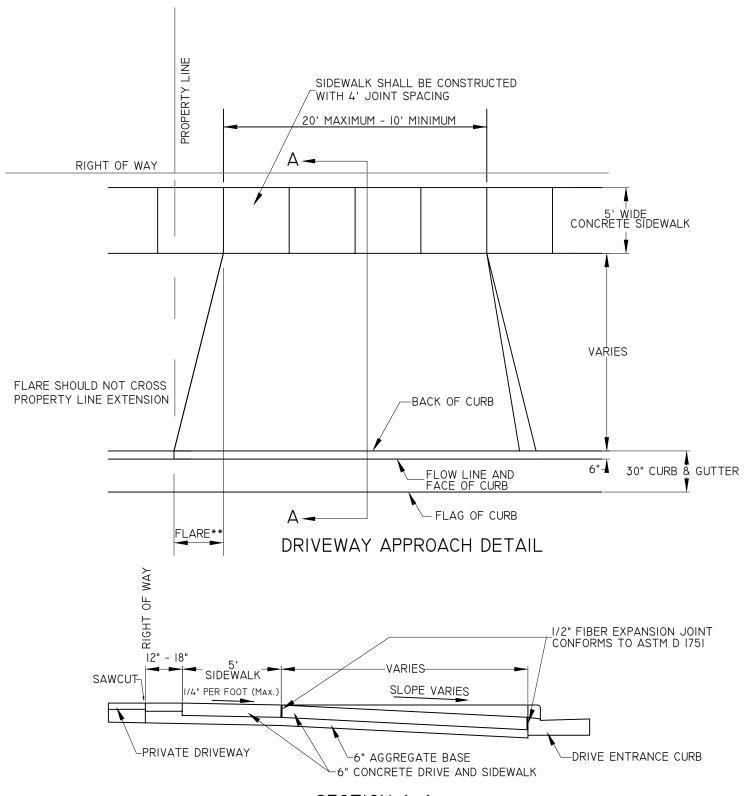


SECTION A~A

NOTES:

I2.07(I2) * ALL SIDEWALKS SHALL BE AT LEAST 5 FEET IN WIDTH AND CONSTRUCTED OF CONCRETE. ALL SIDEWALKS SHALL BE SEPARATED FROM THE PAVED STREET SURFACE BY A MINIMUM 6-FOOT WIDE GRASSED TERRACE. SIDEWALKS SHALL BE LOCATED I2 TO I8 INCHES INSIDE THE RIGHT-OF-WAY LINE UNLESS AN ALTERNATIVE LOCATION IS CONSIDERED APPROPRIATE BY THE CITY ENGINEER.

THE MAXIMUM RESIDENTIAL FLARE IS 4 FEET, AND THE MAXIMUM COMMERCIAL FLARE IS 5 FEET.

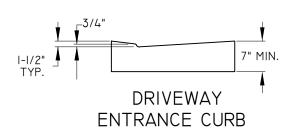

^{**}Driveway flares shall be I foot for terraces <= 3 feet wide, 2 feet for terraces 3 - 6 feet wide, and 3 feet for terraces 6-9 feet wide.